Graetz

SERVICE

SERVICE-INFORMATION

EURO-PAGE 303

Typ 5213 05 91

Technische Daten — Technical Specification

Batterien/Batteries	5 x 1.5 V (IEC R 14) Babyzellen/"C" cells
Netz/Mains	220 V
Kreise/Circuits	AM = 6; FM = 8
Transistoren/ Transistors	11
Dioden/Diodes	9
Lautsprecher/ Loudspeaker	120 mm ⌀; 8 Ohm
Wellenbereiche/ Wave bands	LW 150 — 260 kHz 1160 — 2000 m MW 510 — 1605 kHz 187 — 588 m KW/SW 5.8 — 15.5 MHz 19.3 — 51.72 m UKW/FM 87.5 — 105 MHz 2.88 — 3.45 m
ZF/IF	AM = 460 kHz; FM = 10.7 MHz
Ausgangsleistung/ Output	ca. 1.4 W
Maße/Dimensions	Breite 305 mm, Höhe 170 mm, Tiefe 85 mm Width 305 mm, Height 170 mm, Depth 85 mm
Gewicht/Weight	ca. 1.9 kg

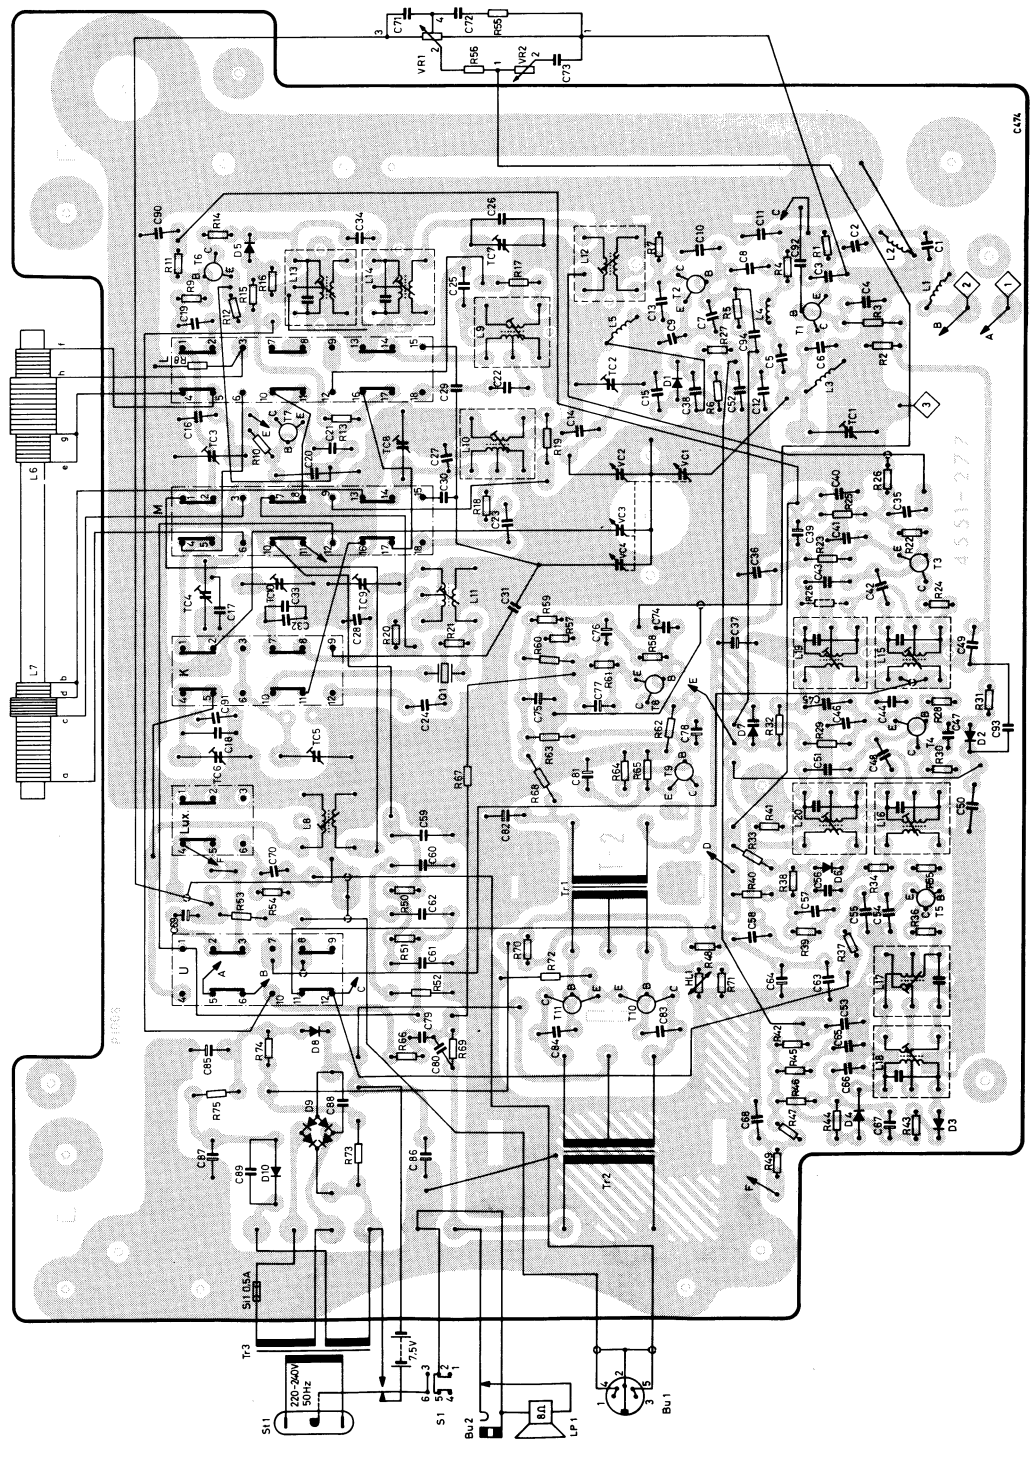

Änderungen vorbehalten — Modifications reserved

Skalenantrieb

Aus dem Skalenseil wird eine Schlaufe von 470 mm gestreckter Länge gefertigt und mit dem Knoten bei A in die Feder eingehängt. Das Skalenseil wird durch die Kerbe des Seilrades 1 rechts um 1 über 2 nach 3 geführt und nach 3 Windungen um 3 weiter über 4, 5, 6 und 7 zum Seilrad 1. Eine Windung wird rechts herum um 1 gelegt, durch die Kerbe geführt, mit der Feder gespannt und bei B eingehängt.

Dial drive

Prepare a loop with an extended length of 470 mm and hook it with the spring at A. Lead the cord through the notch and clockwise around the drive drum 1. Pass the cord around 2 up to the drive spindle 3. After 3 turns counterclockwise around 3, lead it around the pulleys 4, 5, 6 and 7 up to the drive drum 1 and, after a turn clockwise around 1, hook it on with the spring at B.

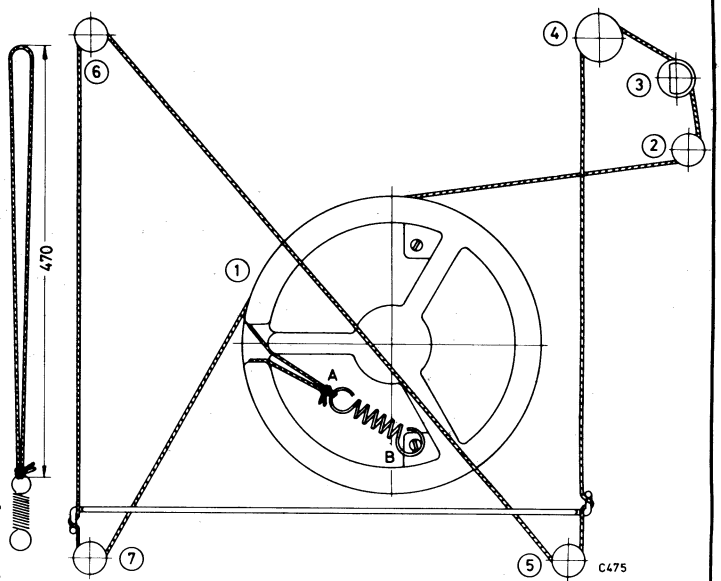

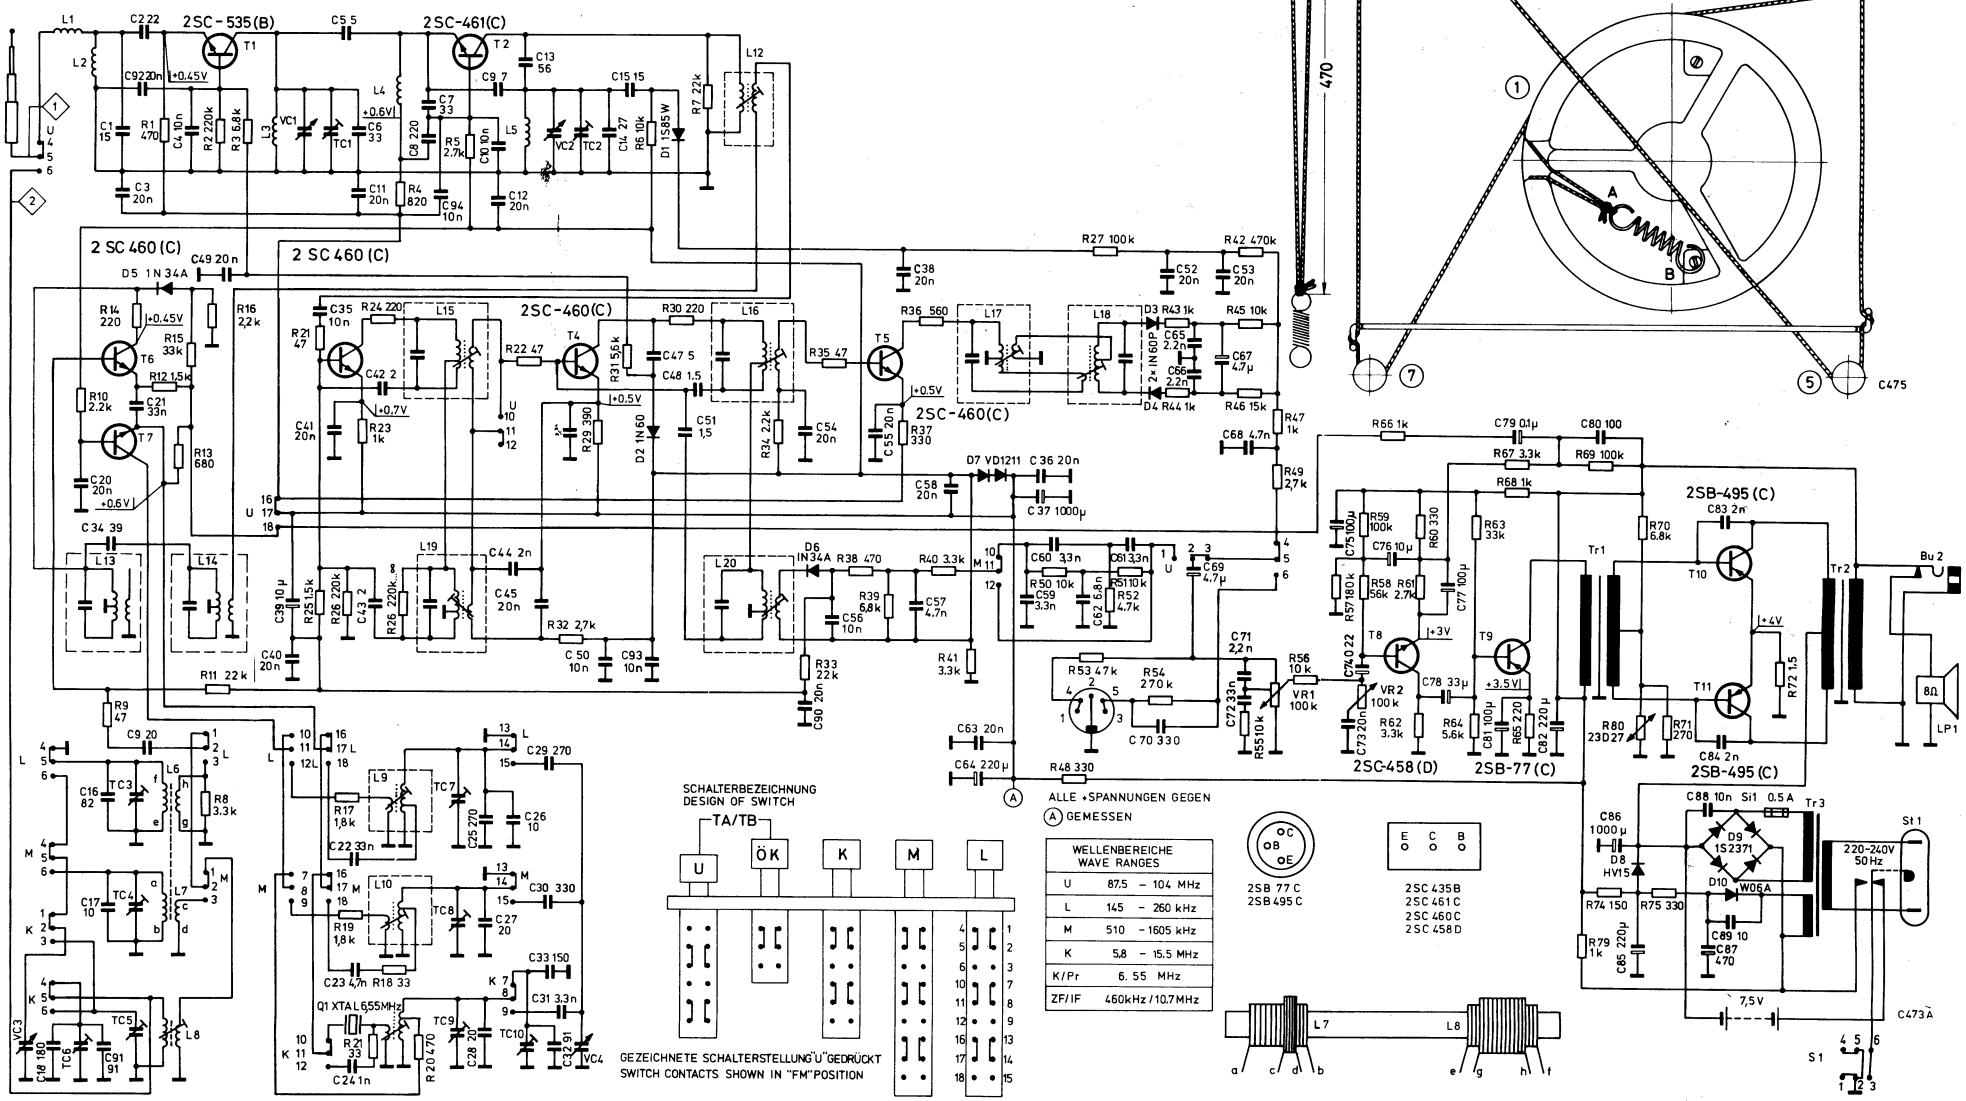

WELLENBEREICHE WAVE RANGES	
U	87,5 – 104 MHz
L	145 – 260 kHz
M	510 – 1605 kHz
K	5,8 – 15,5 MHz
K/Pr	6, 55 MHz
ZF/IF	460kHz / 10,7MHz